


GT STAY-GUARD

GT STAY-GUARD is a simple, easy and effective method of enhancing security. It is a hinge protection device which, when fitted in conjunction with a friction stay, will assist in meeting the requirements of BS7950.

The standard of the finished material is five times stronger than any hinge protector currently available.

The Geomet coating is up to four times more resistant to corrosion than any hinge protector currently available.

Material; Cold rolled CS70 spring steel is Austempered heat treated to a hardness value of 480 to 530. During the Austemper heat treatment process CS70 is transformed from a soft to a hard state. The surface plating has a Geomet finish which meets a 350 hour salt spray test with no base metal corrosion.

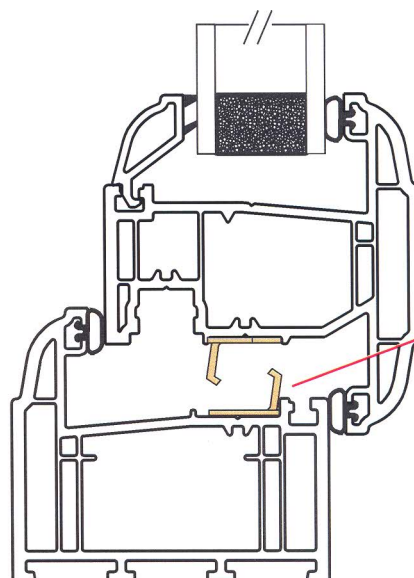

STAY GUARD use No1 for 17mm stack height on both Sash & Frame.

For Egress/Easy Clean use No.3 on sash and No.1 on frame

Manufactured in
the United Kingdom

All drawings are not to scale

Spectus Elite 70mm Internal